

SUPERIOR QUALITY · EXCELLENT SERVICE



SYSTEM SPECIFICATIONS

| GENERAL | |
|--------------------------------------|--------------------------------------|
| Supply voltage and frequency | 100~120VAC, 60Hz or 220~240VAC, 50Hz |
| Power consumption | 1200VA |
| Operating temperature range | +10°C to +40°C |
| RETORT | |
| Capacity | Up to 300 cassettes |
| Temperature (paraffin) | 50°C - 65°C |
| Temperature (dehydration reagent) | Ambient temperature to 65°C |
| Temperature (rinse reagent) | 60°C for alcohol; 65°C for xylene |
| PARAFFIN BATHS | |
| Number of small paraffin cylinders | 3 |
| Number of large paraffin cylinders | 1 |
| Capacity of small paraffin cylinders | 4.2L |
| Capacity of large paraffin cylinders | 5.6L |
| Paraffin melting time | ≤12H |

| REAGENT BOTTLES | |
|------------------------------|---|
| Reagent bottle | 10 |
| Condensate bottle | 1 |
| Rinse bottle | 3 |
| Reagent bottle capacity | Scale LEVEL1: 3L Scale LEVEL2: 4.3L Scale MAX: 4.8L |
| DIMENSIONS AND WEIGHTS | |
| Dimensions, unpacked (WxDxH) | 620 x 640 x 1170mm |
| Weight, unpacked | Approx. 180Kg |
| Weight, packed | Approx. 249Kg |



 **DAKEWE**
Dakewe Medical
Shenzhen, China
www.dakewemedical.com

Authorized Agent: 
2/36 Hensbrook Loop, Forrestdale WA 6112
P: 1300 778 068
E: sales@hurstscientific.com.au
www.hurstscientific.com.au





Safety

Specimen Protection

Comprehensive specimen protection system in accidents.

Specimen Safety

Smart software and safe running in reagent infiltration.

Functional and Performance control

Real-time monitoring in the functional parameters, performance parameters and quality control record. Smart analysis of parameters variation helps to prevent risks.

RELIABLE

Self Check

Key parameters are checked automatically to pre-alert potential risks before processing.

Backup Solutions

- Backup Temperature Control

Dual-sensor temperature control, auto-switch in control algorithm.

Component-level Quality Control




Remote Monitoring System

More than monitor

Monitoring the tissue processor running status (via application through your smart phone, Laptops and iPad with DAKWE free download application) checking the alarmtypes, keep specimens safe.

Liquid Sensor Monitor

Accuracy in the level detection with ultrasonic liquid sensor monitor, reduce misinformation and, easy to maintain.

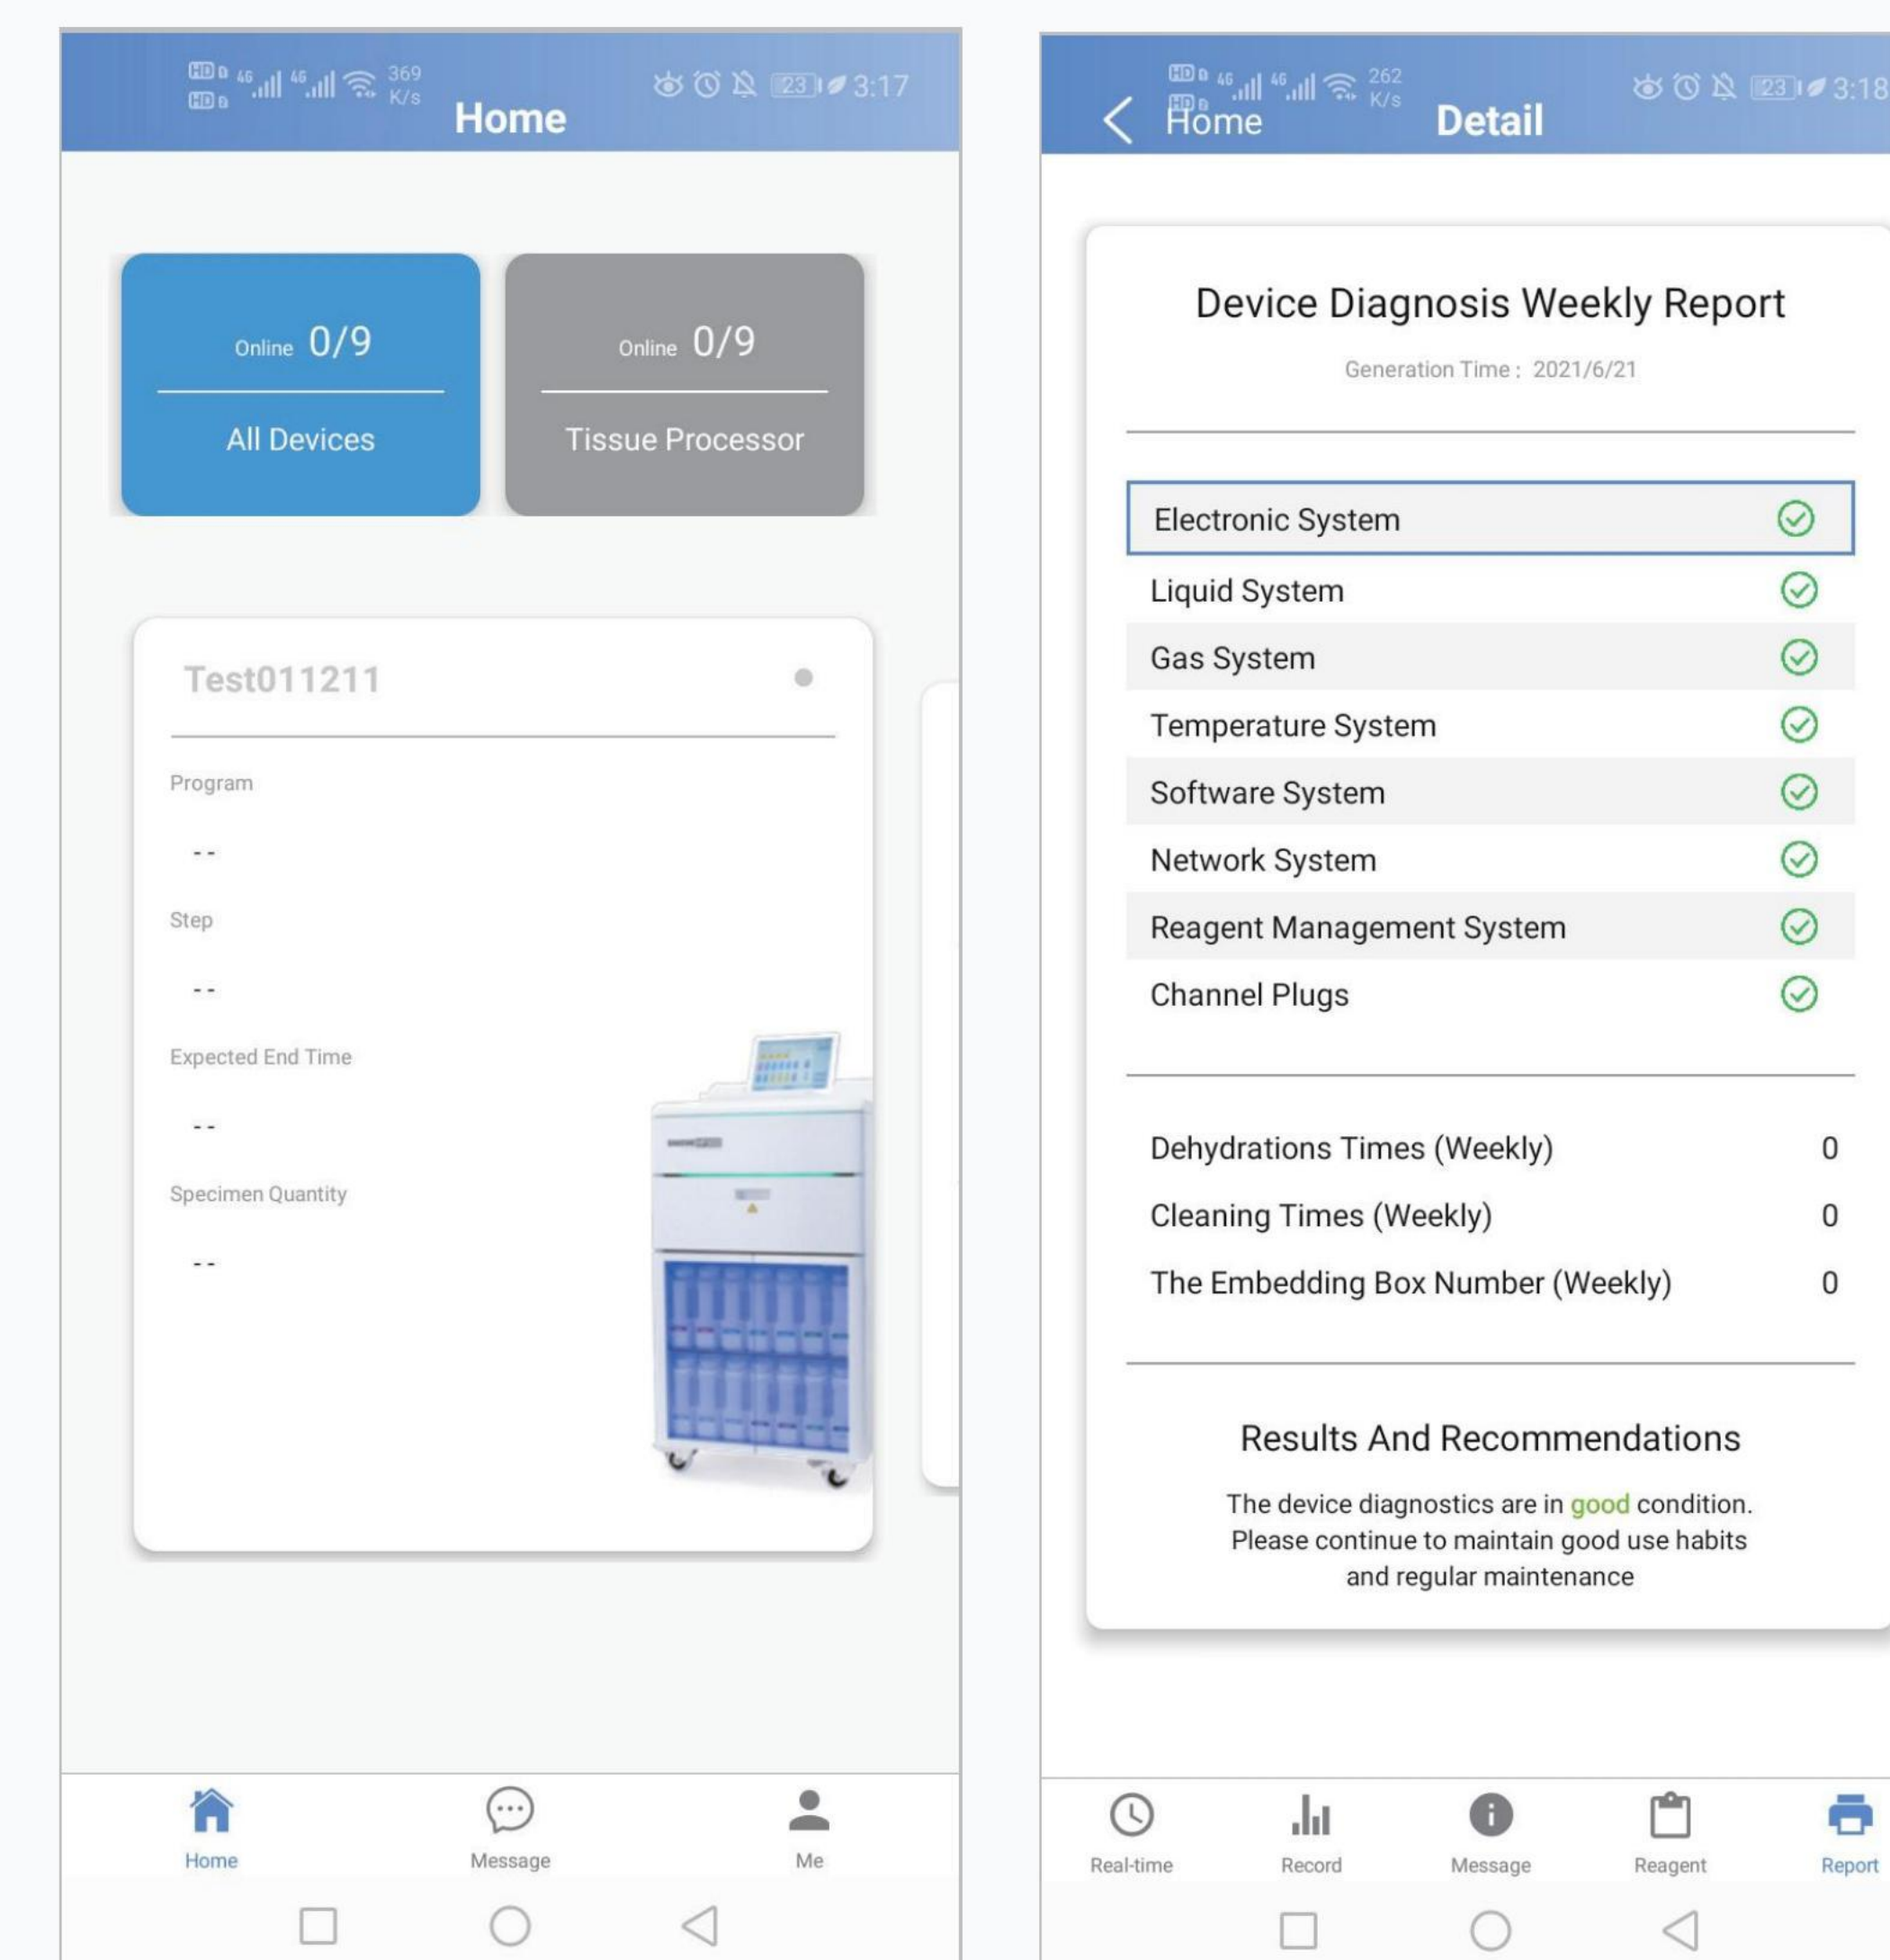





REAGENT QUALITY MANAGEMENT

Reagent Automatic Rotation

Reagent/paraffin automatic rotation, comfortable at operation.

Reagent reminder

Automatic reminder in reagent bottles threshold, reduce misoperation.

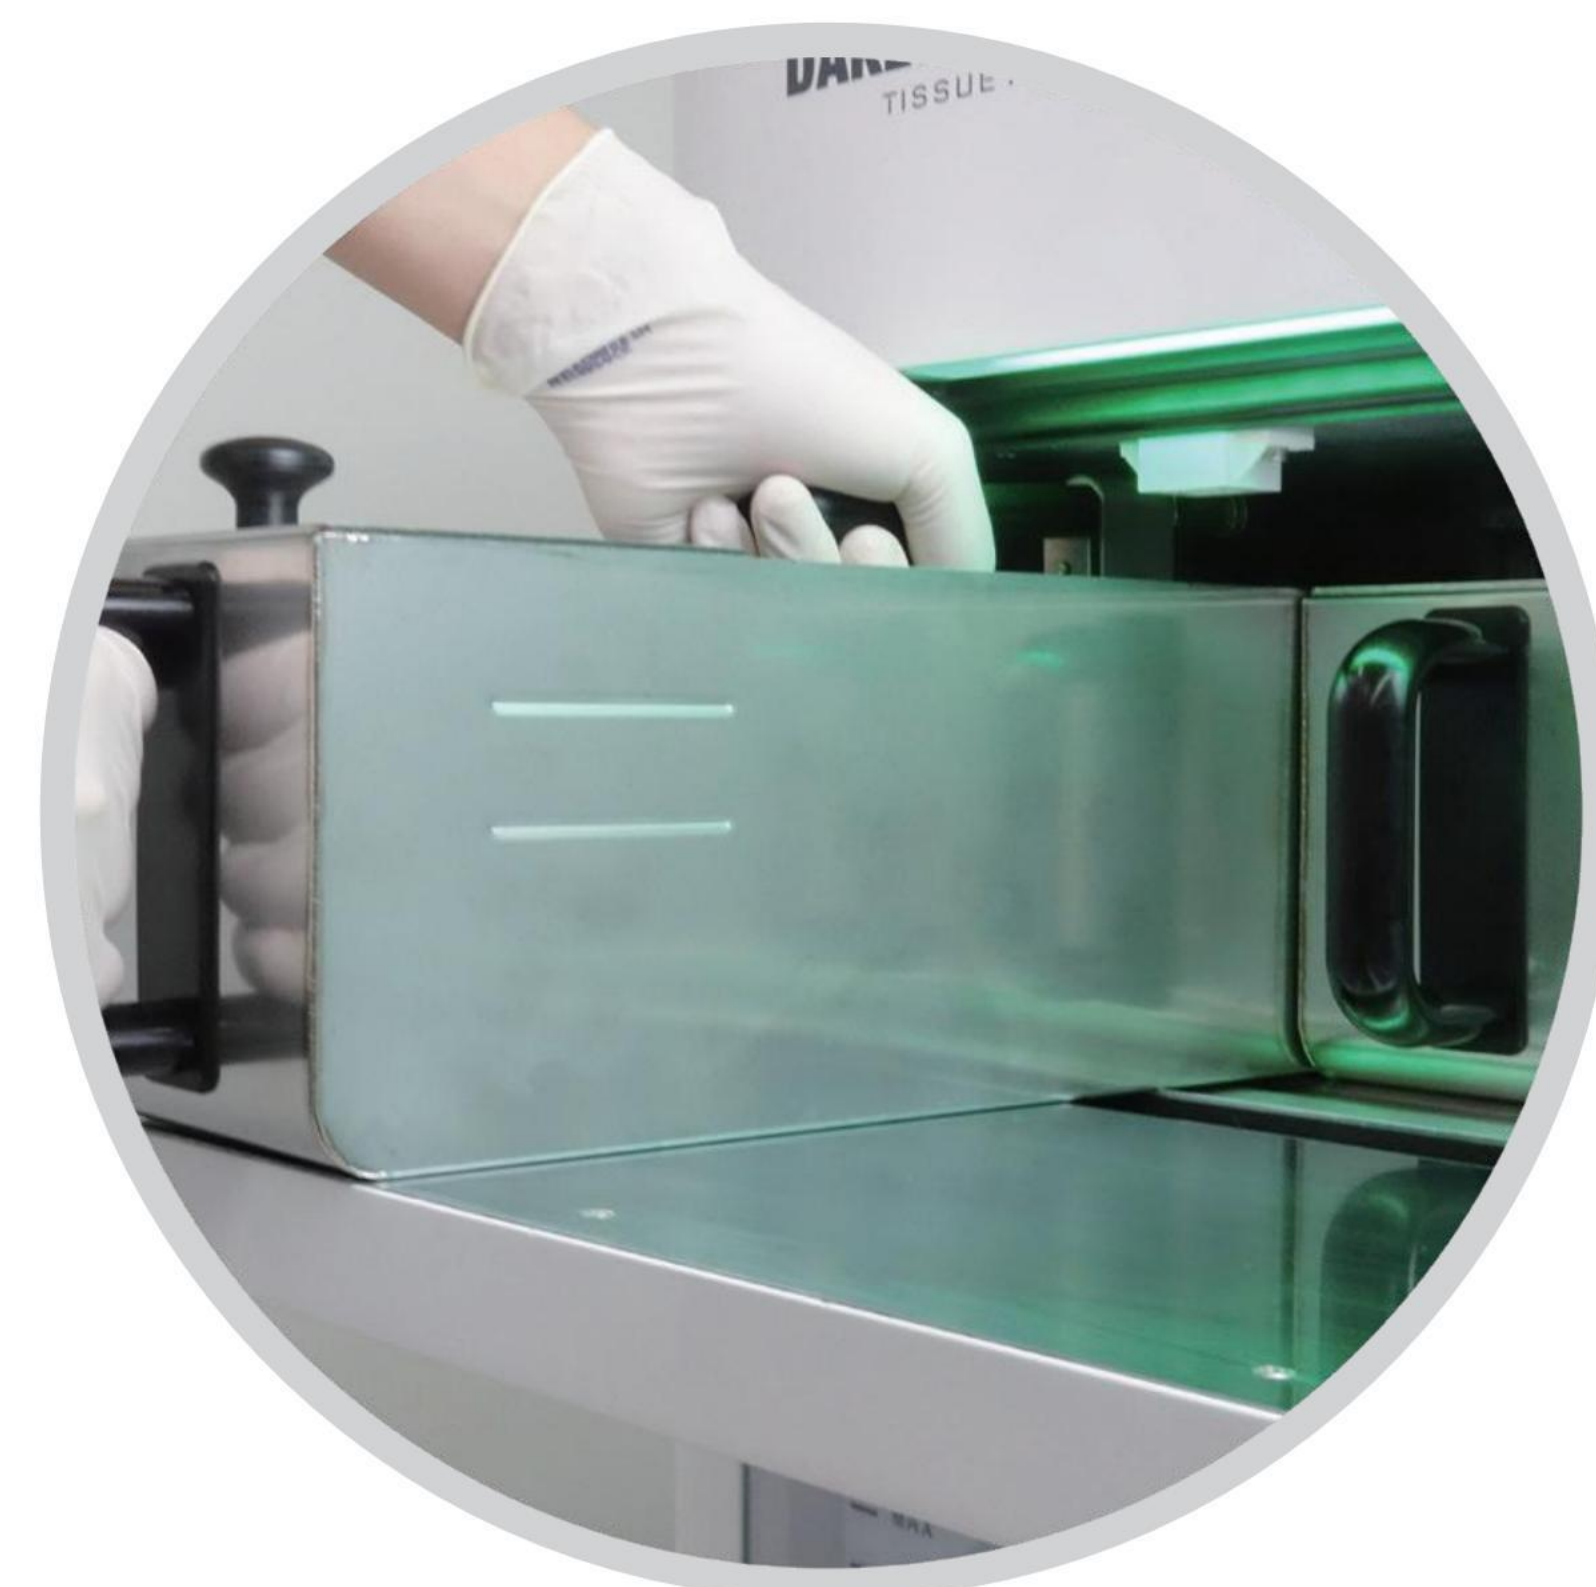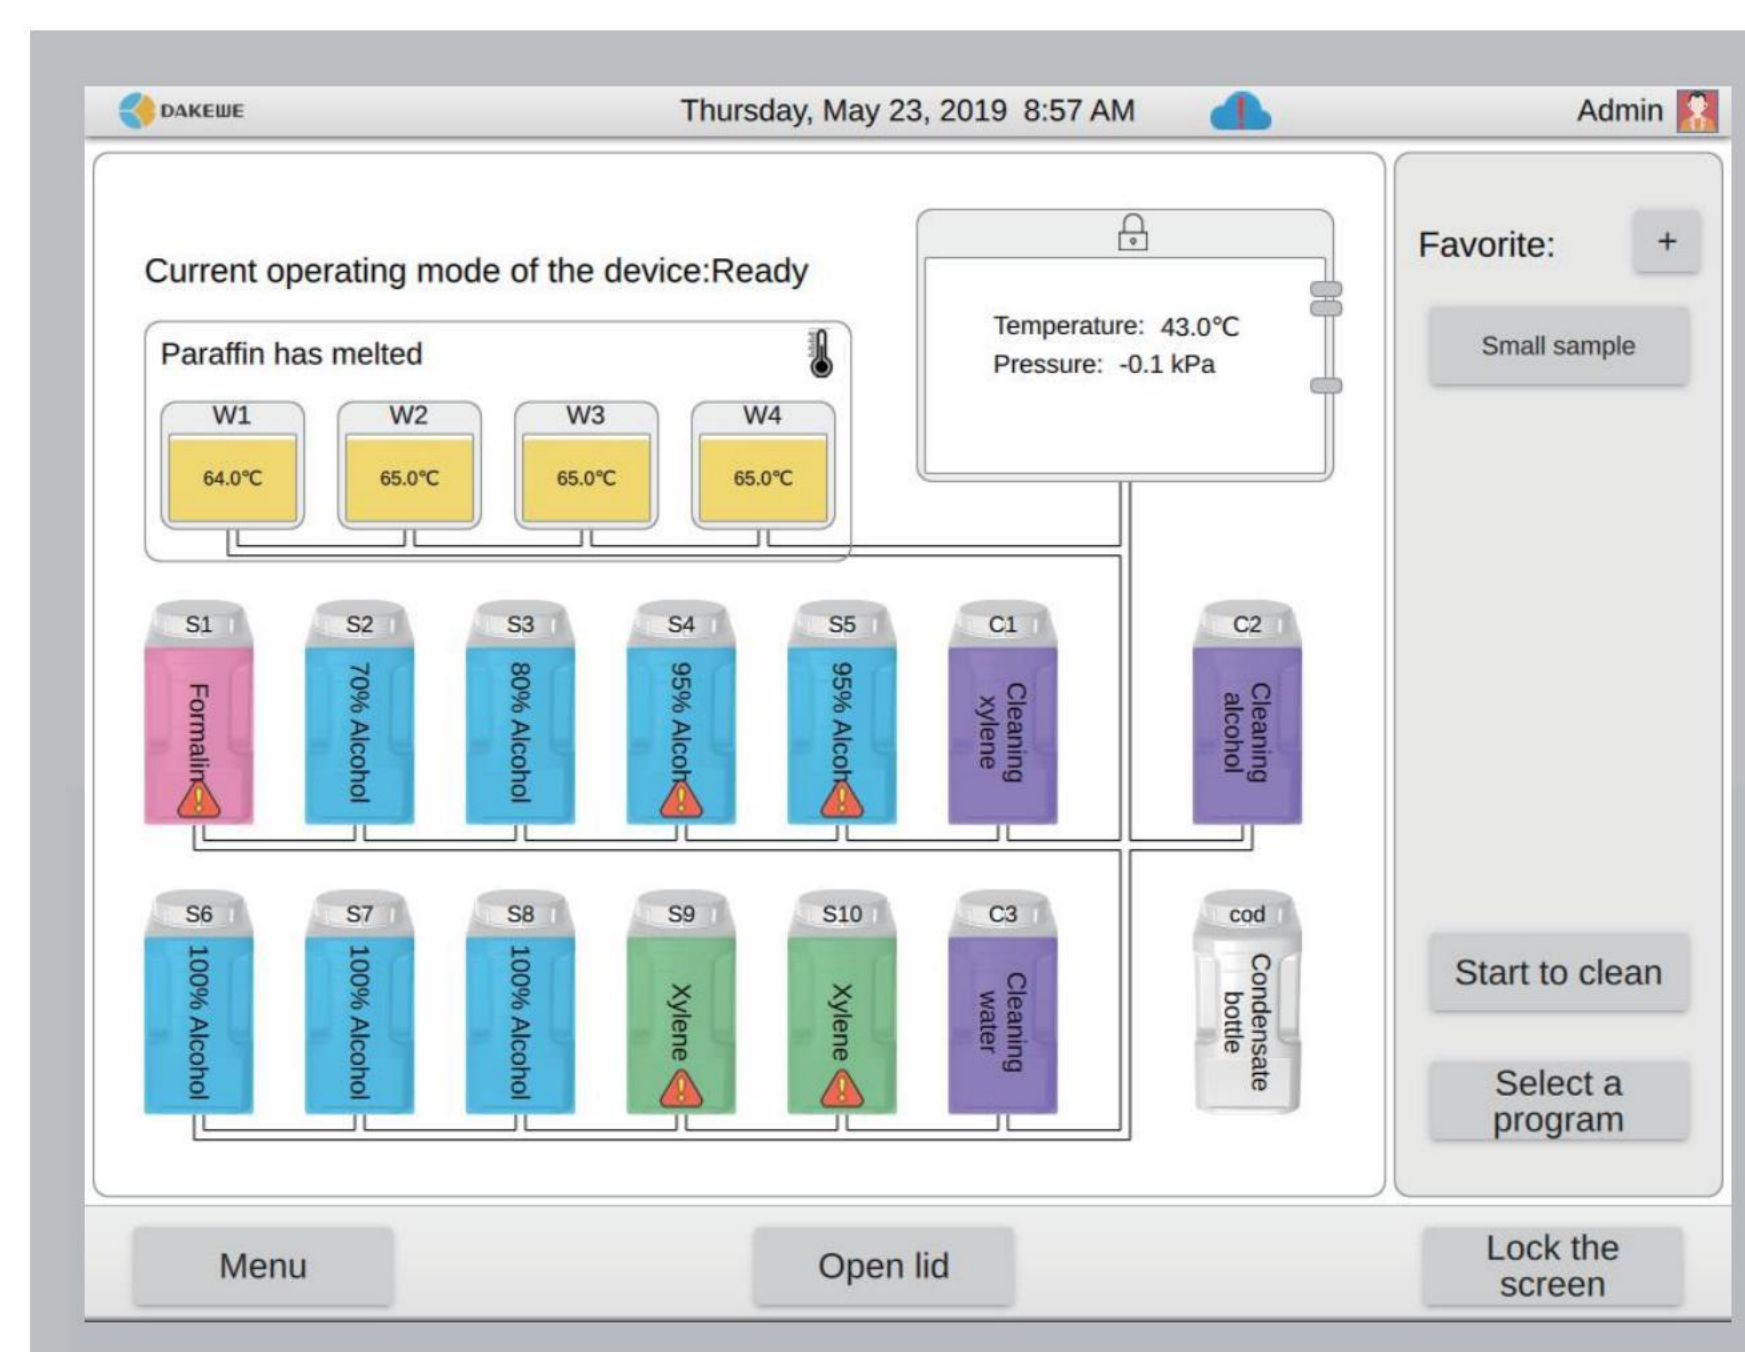

EASY

Easy to use, ease to move, easy to clean, Dakewe Tissue Processor brings to the new working experience into your laboratory.

Electronic Lock

Touch the screen to open the lid, ergonomic handle to lock.

Screen angle adjustable

With a 12.1 inch (30cm) touch screen, the angles can be set to different positions for different perspective habits.

Liquid Level Observation

Blue light design brings a clear vision of the level inside the reagent bottles.

Flexible Processing Capacity

Two models basket are available, 70 cassettes (one basket) and 150 cassettes (one basket).

The processor can handle capacity with 2.5L, 4.0L, which can process 70 cassettes to 300 cassettes at one time according to your needs.

Easy to Clean

Teflon coating on the retort lid, easy to clean.

Patented Marble countertop is easier to clean, care and maintenance.

Concise UI

Convenient GUI design, easy to understand and use.

