

# -10°C~-25°C Biomedical Freezer

*Stable Performance • High Quality*



## DW - YL270



### Refrigeration System

- The environmentally friendly Freon-free refrigerant and high-efficiency enclosed compressor supplied by a famous famous brand can ensure energy saving and low noise;
- The condenser installed on the bottom ensures temperature stability and system reliability.

### Temperature Control

The high-precision computerized temperature control system ensures an adjustable temperature within a range from -10 to -25°C inside the cabinet.

### Security System

The well-developed audible & visual alarm system (sensor failure alarm, high temperature/low low temperature alarm, etc.) makes it safer for storage;  
The turn-on delay and stopping interval protection function can ensure reliability in running;

### Human-oriented

The built-in door seal is dust proof and easy to clean.





### High-precision Temperature Control System

- The system has the function of digital temperature display and temperature inside the cabinet can be set within a range from -10°C to -25°C;
- High-precision microcomputer temperature control system; The platinum resistor temperature sensors ensure more precise temperature control.



### Refrigeration System

- The compressor supplied by an international famous brand compressor is energysaving and environmentally friendly;
- The refrigerating circuit with proprietary intellectualproperty rights ensures high efficiency and stability.



### Structure Design

- Upright type, aluminum plate with spraying material interior, external material is painted steel board;
- Inside drawers made of ABS , 7 drawers .



### Thermal Insulation System

- The two-layer thermal insulating foamed door can prevent loss of refrigerating capacity in an effective way;
- The cabinet is made from CFC-free pol- yurethane material, which can improve its heat insuating performance to a large extent.



### Security System

- The well-developed audible & visual alarm system makes it safer for storage;
- Equipped with alarm functions including high/ low temperature alarm, sensor failure;
- Specially equipped with external door handle and padlock to prevent unauthorized opening.




### Human-oriented

The safety lock on the door, with door handle, 2 universal casters and 2 leveling feet for easy movement and fixation.


## ✓ Scope of Application

Suitable for use in scientific research, cryogenic test on special materials, blood plasma cryopreservation, low temperature resistance test on biological materials, vaccines, biological products and military products, etc. Suitable for use in research institutions, the electronic industry, the chemical industry, hospitals, the health & disease prevention system, laboratories in colleges & universities, military enterprises, etc.

## 🔗 Performance Data / Cooling Curve

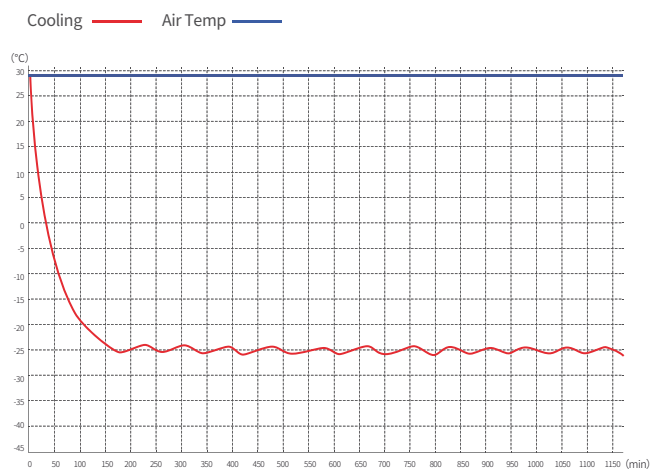

## 📏 External Dimensions

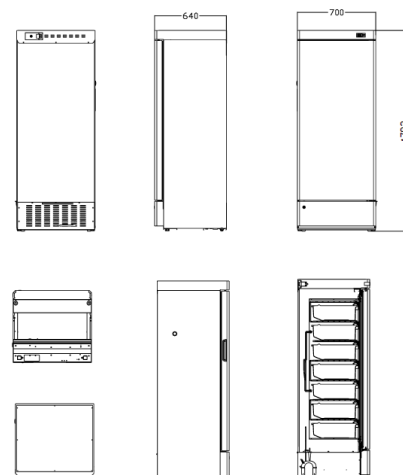

-25°C Biomedical Freezer	
Model	DW-YL270
Cabinet Type	Upright
Capacity(L)	270
Internal Size(W*D*H)mm	500*460*1235
External Size(W*D*H)mm	700*640*1792
Package Size(W*D*H)mm	757*717*1865
NW/GW(Kgs)	90/98
Performance	
Temperature Range	-10~-25°C
Ambient Temperature	16~32°C
Cooling Performance	-25°C
Climate Class	N
Controller	Microprocessor
Display	Digital display
Refrigeration	
Compressor	1pc
Cooling Method	Direct Cooling
Defrost Mode	Manual
Refrigerant	R600a
Insulation Thickness(mm)	100
Construction	
External Material	PCM
Inner Material	Sprayed aluminum plate
Drawers	7(ABS)
Door Lock with Key	Yes
Access Port	1pc. Ø 25 mm
Casters	2+(2 leveling feet)
Alarm	
Temperature	High/low temperature
System	Sensor failure
Construction	Door ajar
Electrical	
Power Supply(V/HZ)	220-240~/50
Power(W)	135
Power Consumption(KWh/24h)	1.21
Rated Current(A)	1.53

\*The model, parameters and performance specified in this brochure may be changed without prior notice because of product upgrading.

\*There may be differences between the product images shown in this brochure and the actual products. When you are buying any product, please check the actual product.