

4°C Blood Bank Refrigerator

Super High Quality
Precise Temperature Control
Safeguarding Security of Blood



XC - 630L



Constant Temperature under Intelligent Control

- Return air duct design, ensuring a temperature control accuracy at 0.1°C inside the cabinet;
- High-precision computerized temperature control system, built-in sensors for upper/lower zone temperature, ambient temperature, evaporator temperature, and operation control, ensuring safe and stable operation.



Security System

- Perfect audible and visual alarm system comes with alarm functions for high temperature, low temperature, sensor fault, door opening, and power failure.



High-efficiency Refrigeration

- Advanced air cooling design, precision temperature control, safeguarding security of blood
- Stainless steel inner container, copper tube evaporator, powerful refrigeration



Precise Temperature Control

1-inch high-brightness digital temperature display, allowing to set the temperature precision within 2~6°C inside the cabinet, and the precision of temperature display accuracy at 0.1°C




Refrigeration System

- Equipped with brand high-efficient compressor, EBM fan motor, performing efficient energy and quiet.
- High-precision computerized temperature control system, built-in sensors for upper/lower zone temperature, ambient temperature, evaporator temperature, and operation control, ensuring safe and stable operation.



Power Management

- Equipped with power management module, optimized energy saving;
- High-precision voltage control, stabilizing the voltage and refrigerator performance
- Reduce the redundancy heat, completely eradicate overheating risk

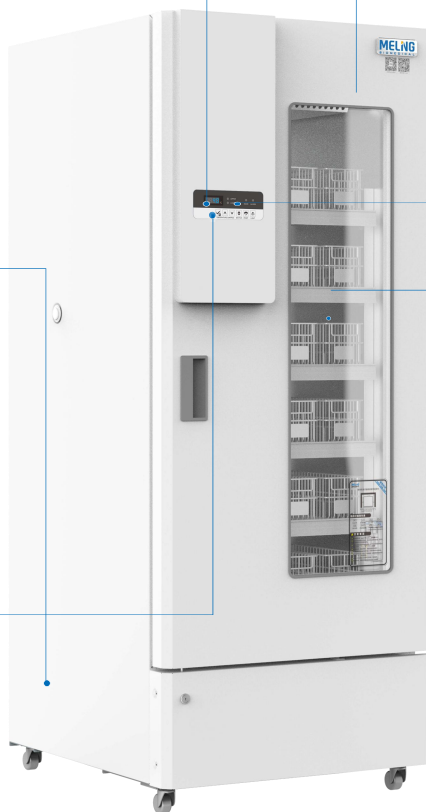


Automatic Defrost

- Return air duct design, ensuring a temperature control precision within 2~6°C inside the cabinet;
- Equipped with automatic defrost function, force defrost
- Optional PVC transparent inner door.



Alarm System

- Perfect audible and visual alarm system comes with alarm function for high temperature, low temperature, sensor fault, door open, and power off.




Human-oriented

- Equipped with 6 dip-coating shelves with label strips (Stainless steel pull-out racks are optional)
- 24 dip-coating blood bag frames, can hold 360 blood bags in 400ml for each.


Scope of Application

Suitable for use in blood banks, hospitals, health and disease prevention systems, research institutions, colleges & universities, the electronic industry, biological engineering, laboratories in colleges & universities, military enterprises, deep-sea fishing companies, etc.

Performance Data / Cooling Curve

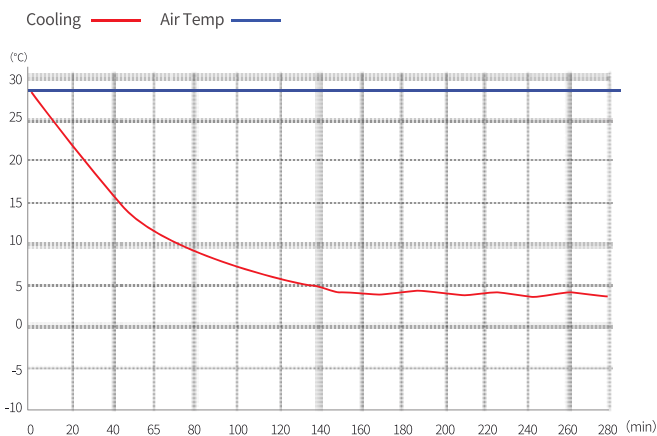

External Dimensions

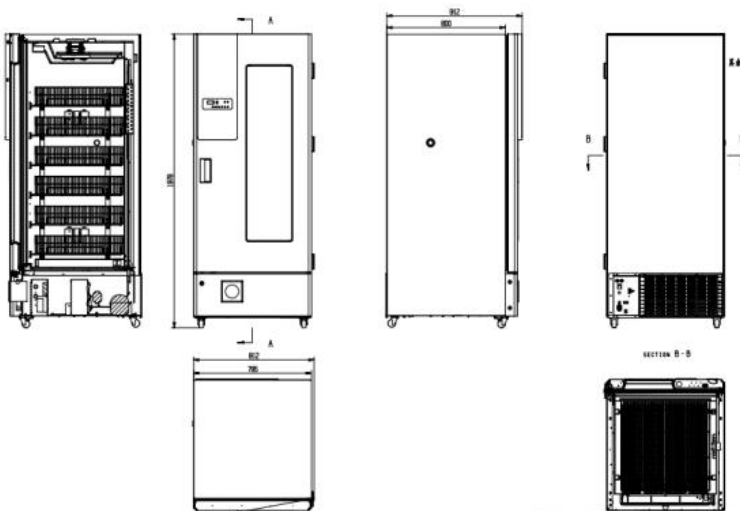

Specification Chart

4°C Blood Bank Refrigerator	
Model	XC-630L
Cabinet Type	Upright
Capacity(L)	630
Internal Size(W*D*H)mm	685*690*1373
External Size(W*D*H)mm	818*912*1978
Package Size(W*D*H)mm	852*962*2131
NW(Kgs)	185
Performance	
Temperature Setting	2~6°C
Ambient Temperature	16-32°C
Climate Class	N
Controller	Microprocessor
Display	Digital display
Refrigeration	
Compressor	1pc
Cooling Method	Air cooling
Defrost Mode	Automatic
Refrigerant	R290
Insulation Thickness(mm)	R/L/U:55,B:50,D:55
Construction	
External Material	PCM
Inner Material	Stainless steel
Shelves	6(coated steel wired shelf)
Door Lock with key	Yes
Access Port	1pc. Ø 25 mm
Casters	4 (2 casters with brake)
Data Logging/Interval/Recording Time	USB/Record every 10 minutes / 2 years
Backup Battery	Yes
Alarm	
Temperature	High/Low temperature, High ambient temperature
Electrical	Power failure , Low battery
System	Sensor error, Door ajar, Condenser overheating,Built-in USB datalogger failure
Electrical	
Power Supply(V/HZ)	220-240~/50~60
Rated Power(W)	470
Rated Current(A)	3
Accessories	
Standard	RS485, Remote alarm contact

*The model, parameters and performance specified in this brochure may be changed without prior notice because of product upgrading.

*There may be differences between the product images shown in this brochure and the actual products. When you are buying any product, please check the actual product.